3 COMMENTATOR SYSTEM

PASSIVE PANEL NETWORK

FTP/CAT 5 MAX 250 M

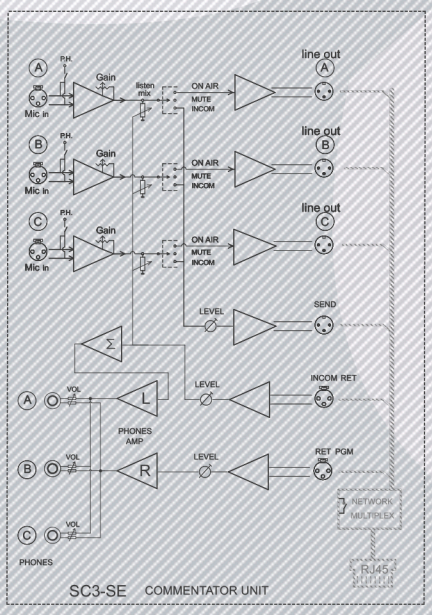

1	INPUT MICROPHONE BALANCED 200 Ω - 10÷+60dB-PH -12 V ULTRA LOW NOISE PREAMP.
2	STEREO PHONES
3	LEVEL PHONES 300 mW 16 Ω MIN
4	SWITCH:
	UP — ACTIVE ON AIR -LED LIGHT
	MIDDLE — OFF MUTE
	DOWN — TALK TO INTERCOM
5	LISTEN MIX BETWEEN COMM
6	LINE OUT 600 Ω 0 dB (+22dB MAX)
7	I/O INTERCOM
8	RETUR PGM
9	I/O DC 9-17 V/ 0,15 A
10	NETWORK ACTIVE
11	LINE OUT 0dB
12	I/O INTERCOM -MAX 2 V (+8 dB)
13	RETUR PGM 0-MAX 2 V (+8 dB)